


DUR-RF2G7-3.6(3.0)

OUTDOOR USB2.0 CAMERA

PARANTEK



Dimension

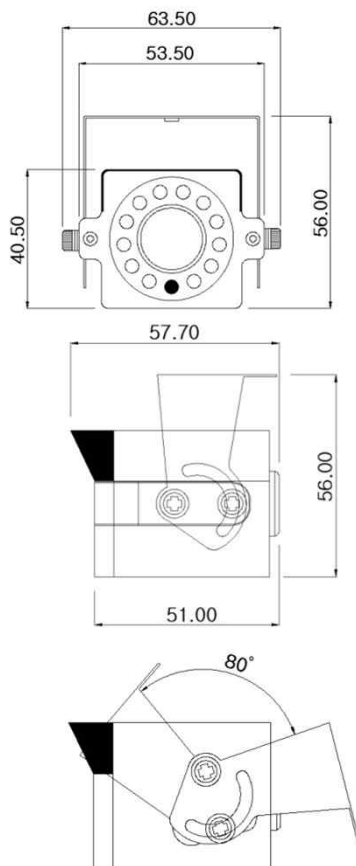

Option

- Lens (Fixed)
f= 2.8mm, 3.3mm, 4mm, 6mm, 8mm, 12mm, 16mm, 25mm
- Cable Length (70cm, 1M) / A or C type USB Conn.
- 1080p60: DUR-RF2G37-3.6(3.0)
- Wall-mount Bracket

Main Features

- 1/2.8" 2MP Sony Starvis CMOS Sensor
- 2 Mega Pixels (Max. 1080p25/30)
- f=3.6mm M/P Lens (TDN ICR)
- 12pcs of 850nm IR LEDs
- USB2.0 Compliant
- Water-proof Housing (IP66)
- Providing 3M long USB cable & U type swivel bracket




Specifications


Model	DUR-RF2G7-3.6(3.0)
Signal System	MJPEG Encoded (USB2.0)
Pickup Device	1/2.8"(D-6.46mm) 2.12M Sony CMOS Sensor
Scanning System	Progressive Scan (16:9)
Sync. System	Internal
Total Pixels	2.16MP [1,945(H)x1,109(V)]
Active Pixels	2.12MP [1,937(H)x1,097(V)]
Min. Illumination	0.1Lux, 0Lux (IR on)
No. of IRED	12ea (850nm)
Video Out (RJ45)	Up to 25/30fps @ 1920x1080p (1920x1080, 1280x720, 640x480, 320x240)
Lens	f=3.6mm, F2.6
Lens (Mount)	Board type (M12)
Angle of View	107.5°(D), 90.5°(H), 51.5°(V)
OSD	N/A
Camera Title	N/A
Language	N/A
White Balance	Auto
WDR	N/A
Day & Night Mode	Auto
Electronic Shutter	Auto
Noise Reduction	2D
DSS(Sens-up)	N/A
Mirror	Off
Other Features	-
Supported O/S	UVC Compatible O/S - Windows, Linux, Mac, Android etc.
No. of Camera ID	Available
Video Codec	MJPEG
Sensor In/Alarm Out	N/A
Audio Line In/Out	N/A
Power Source	DC5V via USB (3M Cable)
Power Consumption	Less than 2.3Watts (460mA@DC5V)
Operating Temp.	-10℃ ~ 55℃ (Humidity :0%RH ~ 90%RH)
Size (mm)	63.5(W) x 40.5(H) x 57.7(D) (Without Bracket)
Weight	320g (gift-box packing)

Cable Connection Interface


DUR-RF2G7-3.6(3.0)

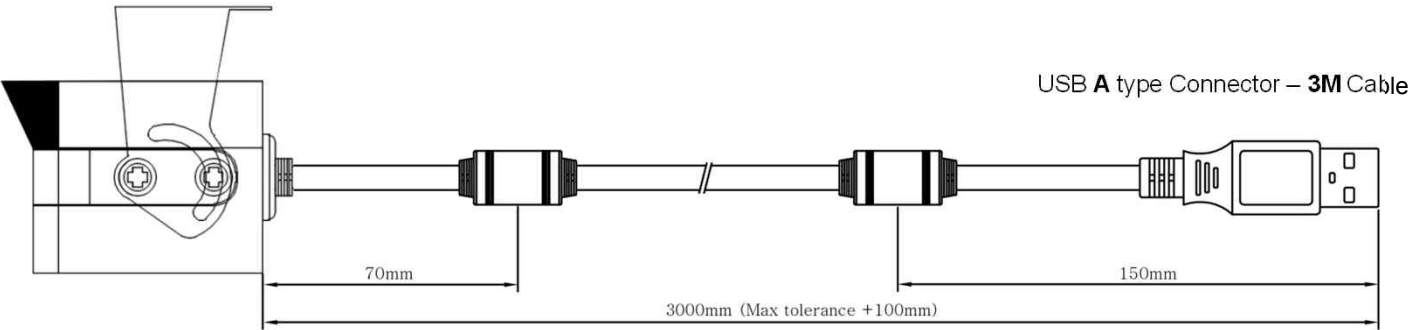

DUR-RF2G7-3.6(1.0)

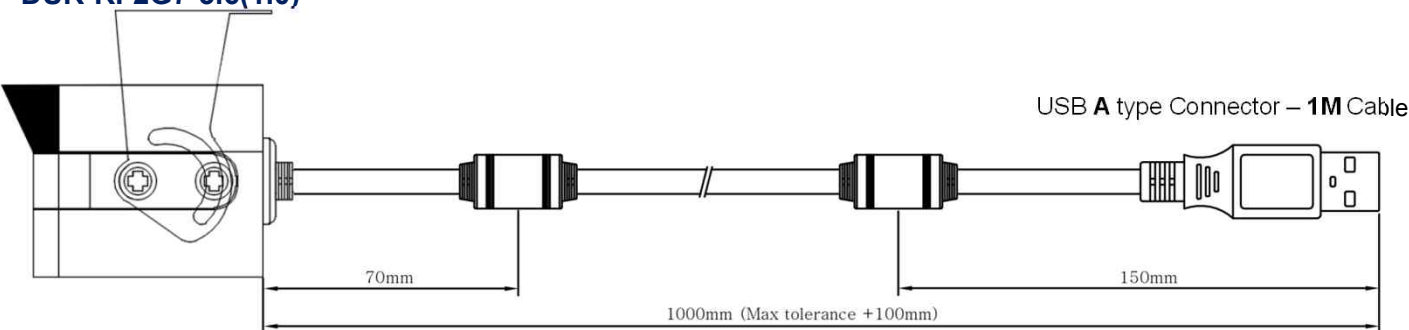

DUR-RF2G7-3.6(0.7)

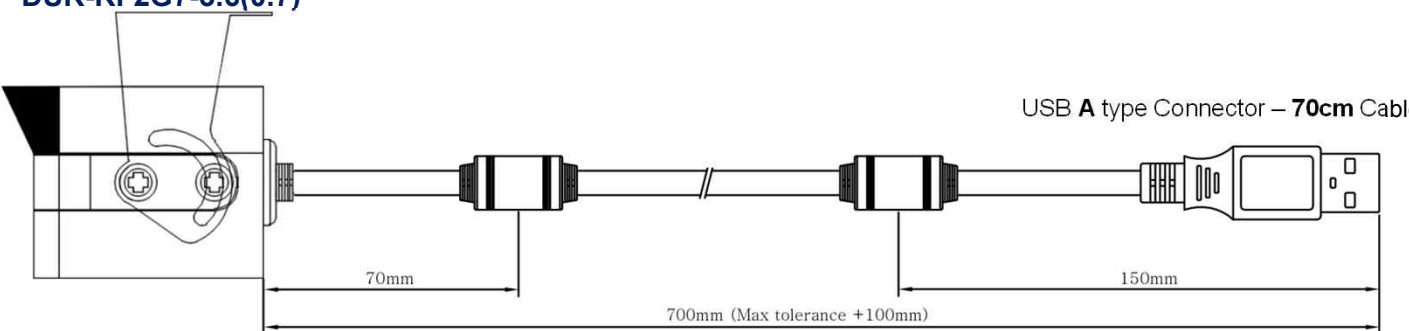

DUR-RF2G7-3.6C(0.7)

